

DOMINO4

DESCRIZIONE | DESCRIPTION

Incasso di profondità ridotta, fissaggio a pavimenti tramite ghiera. Corpo lampada in alluminio anodizzato. Circuito ad alta efficienza con ottiche variabili per ottimizzare e direzionare con precisione il fascio luminoso (lenti disponibili 8°, 12°, 30°, EL).

Prodotto indicato sia per l'illuminazione d'accento che per un'illuminazione radente, effetto wall-wash tramite installazione di ottica ellittica.


Si prevede la possibilità di integrare filtro honey comb all'interno del prodotto. Prevista, in base agli accessori la versione applique, plafone ed incasso.

Low depth recessed luminaire, floor fixing through a ring. Anodised aluminium body. High efficacy circuit with various optics in order to optimize and precisely direct its light beam (available lenses 8°, 12°, 30°, EL).


Ideal product for either accent or grazing illumination, wall-wash effect, thanks to the possibility of implementing optics with an elliptical beam.

We foresee the possibility of integrating a honey comb filter inside the product.


We additionally foresee the possibility of providing applique, ceiling lamp and recessed luminaire versions, in accordance with the accessories available.

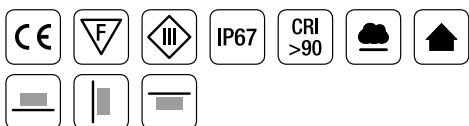

DIMENSIONI | DIMENSION

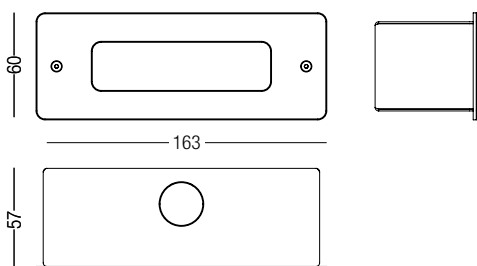

SISTEMI DI FISSAGGIO | FIXING SYSTEMS

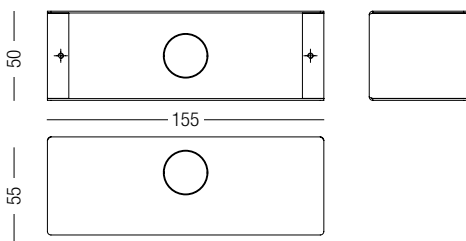

DIAGRAMMI FOTOMETRICI | PHOTOMETRIC DIAGRAM

Diagramma Polare (8°)




Diagramma Conico (8W)

h(m)	Ø(cm)	(lux)
1	14	5259
1.5	21	2244
2	28	1393
2.5	35	901
3	42	630

Diagramma Polare (30°)




Diagramma Conico (8W)

h(m)	Ø(cm)	(lux)
1	54	1174
1.5	80	514
2	107	298
2.5	134	198
3	160	149

8W**350
mA****3000K****1100
lm****Alimentazione remota / Remote LED Driver**

Finitura Finishes	Ottica Optic	Codice Code
<input type="checkbox"/> Acciaio Inox AISI 316 L Stainless Steel AISI 316 L	8°	50150-W-8
<input type="checkbox"/> Acciaio Inox AISI 316 L Stainless Steel AISI 316 L	30°	50150-W-30

Accessori Accessories	Codice Code
Cassaforma Wall-box	50160
Filtro Alveolare Honeycomb Filter	50165

DISPONIBILE SU RICHIESTA | AVAILABLE UPON REQUEST

Finitura Finishes	Colore luce Color Temperature	Dimmerazione Dimmeration
RAL	4000K	bali PUSH 1..10V