

Ospot3 plus



descrizione | description

Spot LED da incasso in acciaio inox AISI 316. Fornito con cassaforma. Calpestabile.

Recessed LED spot for indoor/outdoor, made of stainless steel AISI 316. Equipped with outer casing. Walk on.

ottica | optic

12°, 30°

potenza | power

3W - 350mA
3W - 24Vdc

colore luce | light color

3000°K (W), 4000°K (N)

finiture | finishes

acciaio inox AISI316L / stainless steel AISI316L
bronzo naturale | natural bronze

flusso nominale | led efficiency

4W 500 lm (W) 568 lm (N)
no UV / no infrarossi

alimentatore | power supply

alimentatore remoto / remote transformer
su richiesta con controllo dimmerazione 1-10V / DALI
on request with dimmable control 1-10V / DALI


temperatura di utilizzo | operating temperature

da -20°C a 45°C


versione 350mA - collegamento in serie (350mA)
versione 24Vdc - collegamento in parallelo (24Vdc)



dimensioni | dimension

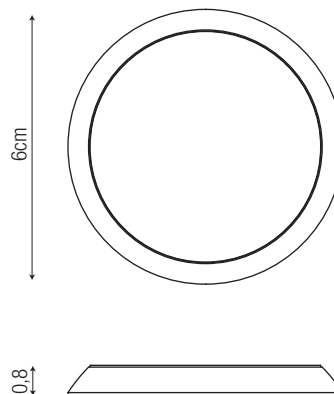

sistema di fissaggio | fixing system

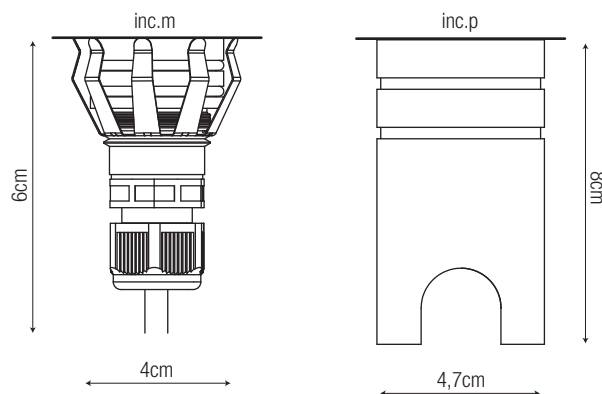

dati illuminotecnici | photometric info

12°		30°	
50cm Ø10cm	4600 lx	50cm Ø26cm	3482 lx
100cm Ø21cm	1246 lx	100cm Ø53cm	865 lx
150cm Ø31cm	544 lx	150cm Ø80cm	383 lx
200cm Ø42cm	319 lx	200cm Ø107cm	216 lx
250cm Ø52cm	201 lx	250cm Ø133cm	138 lx
300cm Ø63cm	144 lx	300cm Ø160cm	96 lx